



PRODUCT INFORMATION



CS1010
PRODUCT SPECIFICATIONS

Power RMS : 250W
 Frequency Response (± 4 dB) : 65Hz-18kHz
 Sensitivity (1m/1w) : 93dB
 Maximum SPL : 125dB
 Impedance : 8 Ω
 Dispersion HxV : 90°x 60°
 Input Mode : 2xSPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimension (DxWxH)mm : 460x300x275
 Color : Black
 Net Weight : 17kg



CS1210
PRODUCT SPECIFICATIONS

Power RMS : 350W
 Frequency Response (± 4 dB) : 59Hz-17kHz
 Sensitivity (1m/1w) : 95dB
 Maximum SPL : 127dB
 Impedance : 8 Ω
 Dispersion HxV : 90°x 60°
 Input Mode : 2xSPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimension (DxWxH)mm : 515x355x310
 Color : Black
 Net Weight : 22kg



CS1510
PRODUCT SPECIFICATIONS

Power RMS : 450W
 Frequency Response (± 4 dB) : 80Hz-17kHz
 Sensitivity (1m/1w) : 96dB
 Maximum SPL : 129dB
 Impedance : 8 Ω
 Dispersion HxV : 90°x 60°
 Input Mode : 2xSPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimension (DxWxH)mm : 600x430x380
 Color : Black
 Net Weight : 29kg




IS1210
PRODUCT SPECIFICATIONS

Power RMS : 600W
 Frequency Response (± 4 dB) : 58Hz-17kHz
 Sensitivity (1m/1w) : 95 dB
 Maximum SPL : 129dB
 Impedance : 8 Ω
 Dispersion HxV : 80°x 50°
 Input Mode : 2x SPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimension (DxWxH)mm : 650x370x340
 Color : Black
 Net Weight : 28.5kg



IS1510
PRODUCT SPECIFICATIONS

Power RMS : 700W
 Frequency Response (± 4 dB) : 45Hz-18kHz
 Sensitivity (1m/1w) : 96dB
 Maximum SPL : 131dB
 Impedance : 8 Ω
 Dispersion HxV : 80°x 50°
 Input Mode : 2x SPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimension (DxWxH)mm : 730x430x400
 Color : Black
 Net Weight : 34kg

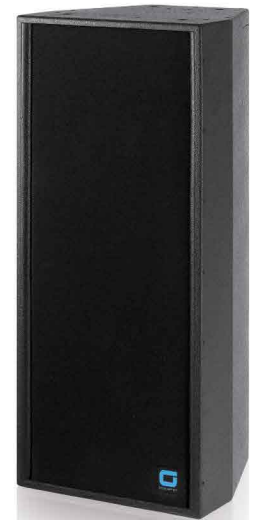

IS1530
PRODUCT SPECIFICATIONS

Power RMS : 1400W biamp powered
 Frequency Response (± 4 dB) 55Hz – 18kHz
 Sensitivity (1W/1m) : 101dB
 Maximum SPL : 135dB
 Impedance : 4/8 Ω
 Input Mode : 2xSPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimensions (WxHxD) mm : 470x800x518
 Color : black
 Net weight : 45kg



IS118 PRODUCT SPECIFICATIONS

Power RMS : 800W
 Frequency Response (± 4 dB) : 42Hz-160Hz
 Sensitivity (1m/1w) : 99dB
 Maximum SPL : 132dB
 Impedance : 8 Ω
 Input Mode : 2x SPEAKON NL-4
 Dimension (DxWxH)mm : 600x600x650
 Color : Black
 Net Weight : 37kg



BP115 PRODUCT SPECIFICATIONS

Power RMS: 1000W
 Frequency Response: 33Hz - 125Hz
 Sensitivity (1W/1m): 100dB
 Maximum SPL: 133dB
 Impedance: 80hms
 Input Mode: 2x SPEAKON NL-4
 Dimensions (DxWxH): 600mm x 500mm x 600mm
 Weight: 44kg

IS215 PRODUCT SPECIFICATIONS

Power RMS : 1400W
 Frequency Response (± 4 dB) : 45Hz-160Hz
 Sensitivity (1m/1w) : 100dB
 Maximum SPL : 134dB
 Impedance : 4 Ω
 Input Mode : 2x SPEAKON NL-4
 Dimension (DxWxH)mm : 430x845x460
 Color : Black
 Net Weight : 57kg



IS218 PRODUCT SPECIFICATIONS

Power RMS : 1600W
 Frequency Response (± 4 dB) : 40Hz-160Hz
 Sensitivity (1m/1w) : 102dB
 Maximum SPL : 138dB
 Impedance : 4 Ω
 Input Mode : 2x SPEAKON NL-4
 Dimension (DxWxH)mm : 600x1000x650
 Color : Black
 Net Weight : 83kg




BP118 PRODUCT SPECIFICATIONS

Power RMS: 1200W
 Frequency Response: 33Hz - 125Hz
 Sensitivity (1W/1m): 101dB
 Maximum SPL: 135dB
 Impedance: 80hms
 Input Mode: 2x SPEAKON NL-4
 Dimensions (DxWxH): 600mm x 590mm x 800mm
 Weight: 52kg

BP218XP PRODUCT SPECIFICATIONS

Power RMS : 2600W
 Frequency Response (± 4 dB) : 30Hz-160Hz
 Sensitivity (1m/1w) : 104dB
 Maximum SPL : 143dB
 Impedance : 4 Ω
 Input Mode : 2x SPEAKON NL-4
 Hoisting And Install : Placed horizontally or upright
 Dimension (DxWxH)mm : 1280x840x600
 Color : Black
 Net Weight : 97kg




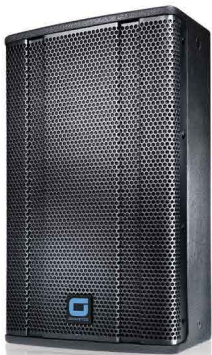

G112

PRODUCT SPECIFICATIONS.

Power RMS: 750W
 Frequency Response: 55Hz - 18000Hz
 Sensitivity (1W/1m): 100dB
 Maximum SPL: 131dB
 Impedance: 80hms
 Dispersion (HxV): 60° x 40°
 Input Mode: 2x SPEAKON NL-4
 Rigging and Hanging: M10 rigging points
 Dimensions (DxWxH): 365mm x 350mm x 580mm
 Weight: 27kg

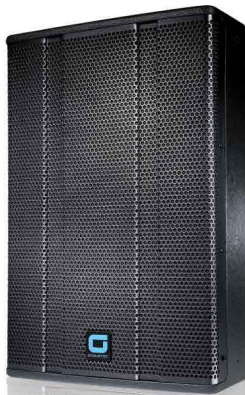

G115

PRODUCT SPECIFICATIONS.

Power RMS: 900W
 Frequency Response: 50Hz - 18000Hz
 Sensitivity (1W/1m): 100dB
 Maximum SPL: 133dB
 Impedance: 80hms
 Dispersion (HxV): 60° x 40°
 Input Mode: 2x SPEAKON NL-4
 Rigging and Hanging: M10 rigging points
 Dimensions (DxWxH): 430mm x 420mm x 645mm
 Weight: 30kg



G212

PRODUCT SPECIFICATIONS.

Power RMS: 1200W low, 150W mid-high
 Frequency Response: 55Hz - 18000Hz
 Sensitivity (1W/1m): 103dB
 Maximum SPL: 135dB
 Impedance: 40hms low, 80hms mid-high
 Dispersion (HxV): 60° x 40°
 Input Mode: 2x SPEAKON NL-4, biamp mode
 Rigging and Hanging: M10 rigging points
 Dimensions (DxWxH): 455mm x 400mm x 760mm
 Weight: 41kg



G215

PRODUCT SPECIFICATIONS.

Power RMS: 1400W low, 150W mid-high
 Frequency Response: 50Hz - 18000Hz
 Sensitivity (1W/1m): 104dB
 Maximum SPL: 137dB
 Impedance: 40hms low, 80hms mid-high
 Dispersion (HxV): 60° x 40°
 Input Mode: 2x SPEAKON NL-4, biamp mode
 Rigging and Hanging: M10 rigging points
 Dimensions (DxWxH): 530mm x 430mm x 840mm
 Weight: 44kg

OGOS LINEARRAY



OGOS8[®] PRODUCT SPECIFICATIONS

Power RMS : 500W/Low , 100W/High
 Frequency Response (± 4 dB) : 59Hz-17kHz
 Sensitivity (1m/1w) : 101dB LF/109dB HF
 Maximum SPL : 128dB LF/129dB HF
 Impedance : 8 Ω Low / 16 Ω High
 Dispersion HxV : 90°x 7°
 Input Mode : 2x SPEAKON NL-4
 Rigging and Hanging : Rigging hardware
 Dimension (DxWxH)mm : 450x255x600
 Color : Black
 Net Weight : 21kg



OGOS B12[®] PRODUCT SPECIFICATIONS

Power RMS : 1600W
 Frequency Response (± 4 dB) : 59Hz-160Hz
 Sensitivity (1m/1w) : 103dB
 Maximum SPL : 134dB
 Impedance : 4 Ω
 Input Mode : 2x SPEAKON NL-4
 Rigging and Hanging : Rigging hardware
 Dimension (DxWxH)mm : 600x640x390
 Color : Black
 Net Weight : 35kg



CX15[®] PRODUCT SPECIFICATIONS

Power RMS : 900W
 Frequency Response (± 4 dB) : 70Hz-18kHz
 Sensitivity (1m/1w) : 99dB
 Maximum SPL : 133dB
 Impedance : 8 Ω
 Dispersion HxV : 70°x 70°
 Input Mode : 2xSPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimension (DxWxH)mm : 580x460x384
 Color : Black
 Net Weight : 34kg



M210[®] PRODUCT SPECIFICATIONS

Frequency Response (± 4 dB) : 55Hz-18kHz
 Sensitivity (1m/1w) : 100dB
 Maximum SPL : 129dB
 Impedance : 8 Ω
 Dispersion HxV : 90°x 60°
 Input Mode : 2x SPEAKON NL-4
 left+right
 Dimension (DxWxH)mm : 445x620x360
 Color : Black
 Weight : 28kg



QUBE6[®] PRODUCT SPECIFICATIONS

Power RMS : 180W
 Frequency Response (± 4 dB) : 100Hz-18kHz
 Sensitivity (1m/1w) : 94dB
 Maximum SPL : 117dB
 Impedance : 8 Ω
 Dispersion HxV : 70°Conical
 Input Mode : 2x SPEAKON NL-4
 Rigging and Hanging : M10 Rigging points
 Dimension (DxWxH)mm : 190x190x190
 Color : Black (Customizable)
 Weight : 4kg



PARAMETER	T2000	T3600
Power RMS Stereo 8 Ohms	1000W	1800W
Power RMS Stereo 4 Ohms	1900W	3500W
Power RMS Stereo 2 Ohms	2800W	6000W
Frequency response	32 dB	
Amplifier Gain	20 Hz- 25kHz, +/- 0.5dB	
Inputs	XLR 3-pol type, loop thru outputs, electronically balanced	
Outputs	Speakon type, 4-wire system connection supplied	
Technology	Class AB with transformer power supply	Class D with Switching Mode Power Supply
Dimensions (W x D x H)	483mm x 377mm x 88mm	
Weight	25kg	13kg

CASE STUDY



G-ACOUSTIC (UG) HAFTUNGSBESCHRÄNKT
 ADD: Salzunger Str. 15a 36460 Merkers-Kieselbach Germany
 Phone: +49-36969-53743 Fax: +49-36969-53767
 E-Mail: info@g-acoustic.de Web: www.g-acoustic.de